



PROLYTE⁴

Feel. Fantastic.



Prolyte Clamps Brochure 2022



DESIGNED TO THE LATEST INDUSTRY STANDARDS, THE PROLYTE BRANDED CLAMPS COMPLY WITH ALL LATEST SAFETY REGULATIONS AND STANDARDS

This brochure presents the Prolyte branded cell clamps that prove helpful in the assembly of your truss constructions. Prolyte accessories all have one thing in common: they have been developed to help you realize the many possibilities and full potential offered by your Prolyte truss system.



All Prolyte clamps are designed and manufactured to the latest industry standards, and all comply with safety regulations and are TÜV approved. They are standard available in both aluminium or black coated finish.



The clamps are designed to fit a 32 mm (1 1/4") to 35 mm (1 3/8") tubes and are extruded from a high tensile aluminium alloy.

Technical features:

- Compatible with the E20 Series truss
- Rated with safety factor 8:1 (kg) DGUV17/BGV C1
- Polished surface with laser markings
- Interchangeable M10 screw which ensures flexible attachment points
- Black anodized standard available, other colours on request

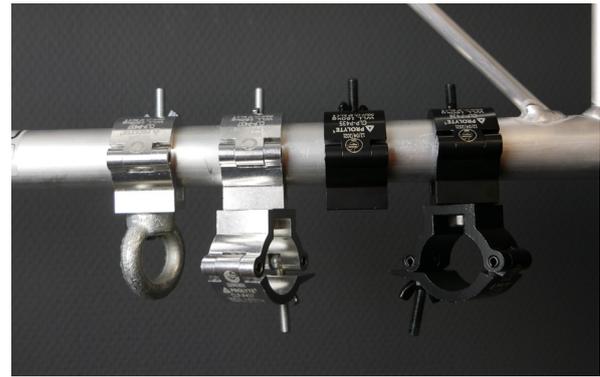


CLP-P435

weight = 0.08 kg

Clamp (32-35 mm)

SWL 160 kg (SF 8:1)




CLP-P435B (Black)

weight = 0.08 kg

Clamp (32-35 mm)

SWL 160 kg (SF 8:1)

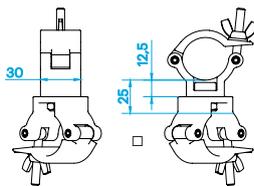


CLP-P436

weight = 0.16 kg

Swivel coupler (32-35 mm)

SWL 160 kg (SF 8:1)

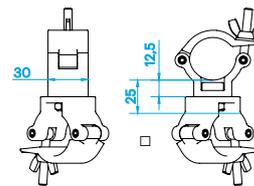


CLP-P436B (Black)

weight = 0.16 kg

Swivel coupler (32-35 mm)

SWL 160 kg (SF 8:1)



CLP-P437

weight = 0.28 kg

Clamp with eye nut (32-35 mm)



SWL 160 kg (SF 8:1)




The clamps are designed to fit a 48 mm (1 7/8") to 51 mm (2") tubes and are extruded from a high tensile aluminium alloy.

Technical features:


- Compatible with the X/H30 and 40, S36, S40, S52, S66 and S100 Series truss
- Rated with safety factor 8:1 (kg) DGV1722/BGV C1
- Polished surface with laser markings
- Equipped with a M12 Bolt and wingnut
- Black anodized standard available, other colours on request

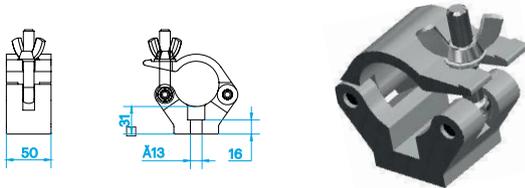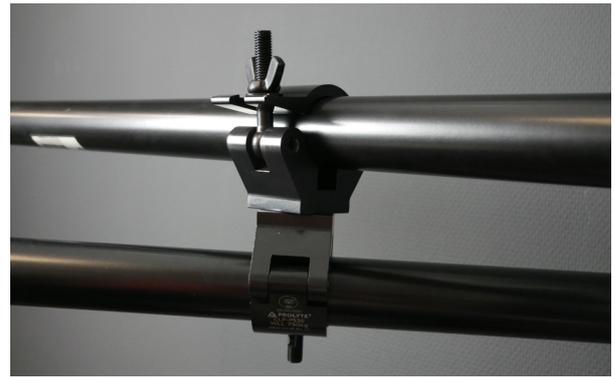


CLP-P535	weight = 0.28 kg
Clamp (48-51 mm)	SWL 650 kg (SF 8:1)

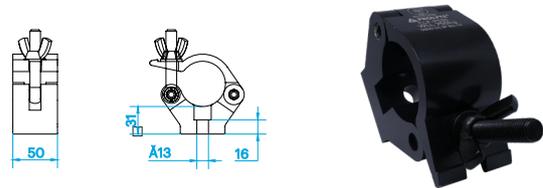


CLP-P535B (Black)	weight = 0.28 kg
Clamp (48-51 mm)	SWL 650 kg (SF 8:1)

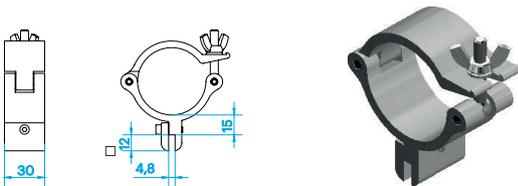


CLP-P535-FPC	weight = 0.22 kg
Panel holder (48-51 mm)	SWL 55 kg (SF 8:1)

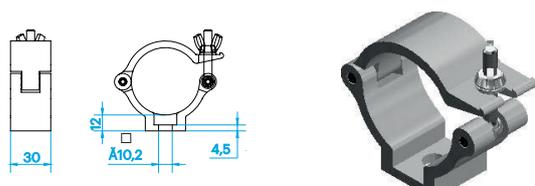


CLP-P535L	weight = 0.14 kg
Clamp (48-51 mm)	SWL 230 kg (SF 8:1) kg

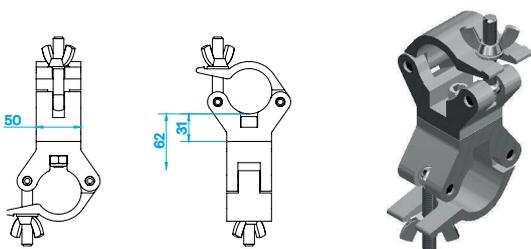

CLP-P536	weight = 1.34 kg
Swivel coupler (48-51 mm)	SWL 540 kg (SF 8:1)

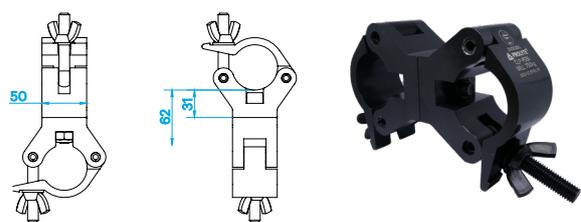


CLP-P536B (Black)	weight = 1.34 kg
Swivel coupler (48-51 mm)	SWL 540 kg (SF 8:1)

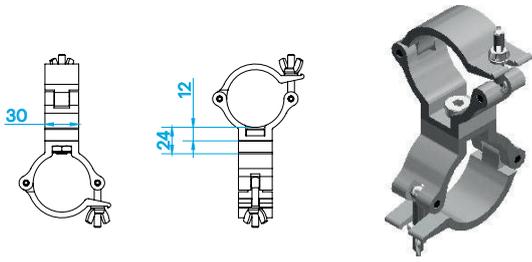

CLP-P536L weight = 0.27 kg
Swivel coupler (48-51 mm) SWL 230 kg (SF 8:1)




CLP-P537 weight = 0.83 kg
Clamp with eye nut (48-51 mm) SWL 170 kg (SF 8:1)

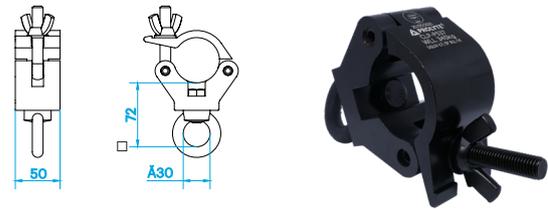


CLP-P537B (Black) weight = 0.83 kg
Clamp with eye nut (48-51 mm) SWL 170 kg (SF 8:1)




CLP-P538 weight = 0.41 kg
Clamp with eye nut (48-51 mm) SWL 750 kg (SF 8:1)

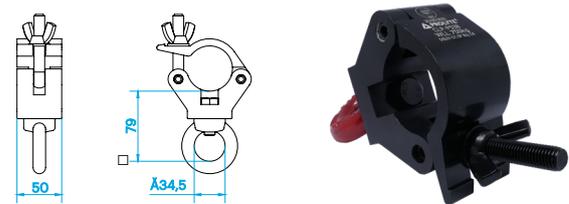


CLP-P538B (Black) weight = 0.41 kg
Clamp with eye nut (48-51 mm) SWL 670 kg (SF 8:1)

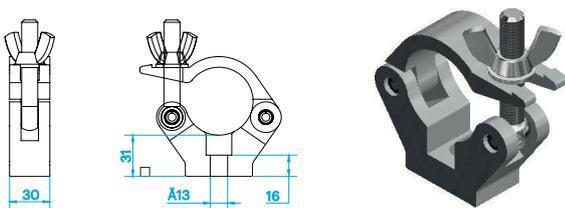


CLP-P545 weight = 0.41 kg
Clamp slim (48-51 mm) SWL 560 kg (SF 8:1)

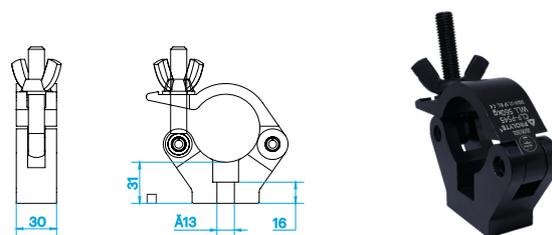


CLP-P545B (Black) weight = 0.41 kg
Clamp slim (48-51 mm) SWL 560 kg (SF 8:1)

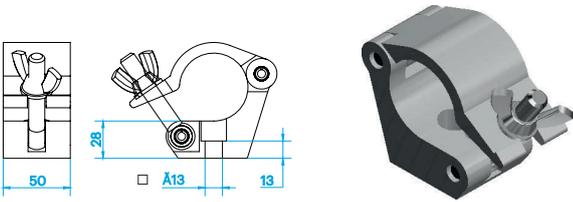


CLP-P587 weight = 0.57 kg
Clamp side entry (48-51 mm) | SWL 780 kg (SF 8:1)

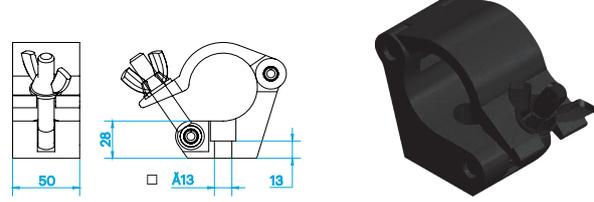


CLP-P587B (Black) weight = 0.57 kg
Clamp side entry (48-51 mm) | SWL 780 kg (SF 8:1)

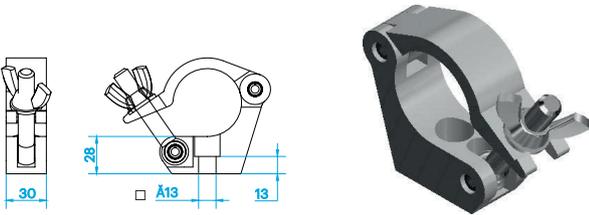


CLP-P588 weight = 0.37 kg
Clamp slim side entry (48-51 mm) | SWL 410 kg (SF 8:1)

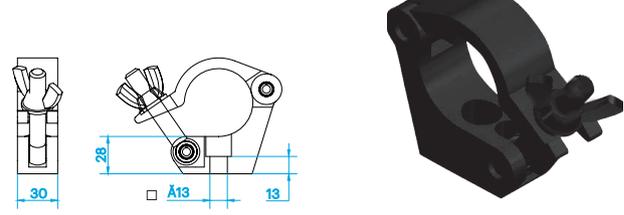

CLP-P588B (Black) weight = 0.37 kg
Clamp slim side entry (48-51 mm) | SWL 410 kg (SF 8:1)

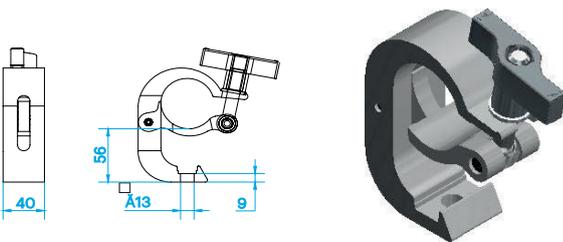

CLP-P589 weight = 0.50 kg
Clamp (48-51 mm) | SWL 350 kg (SF 8:1)

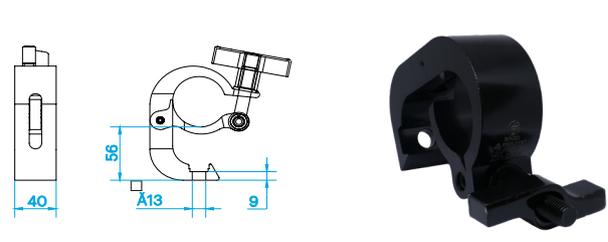

CLP-P589B (Black) weight = 0.50 kg
Clamp (48-51 mm) | SWL 350 kg (SF 8:1)







The clamps are designed to fit a 60 mm (2 3/8") to 63.5 mm (2 1/2") tubes and are extruded from a high tensile aluminium alloy.

Technical features:


- Compatible with the B100 and C52T Series truss
- Rated with safety factor 8:1 (kg) DGV17/BGV C1
- Polished surface with laser markings
- Equipped with a M12 Bolt and wingnut
- Black anodized standard available, other colours on request

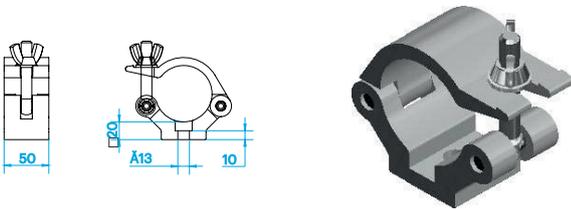


CLP-P635 weight = 0.65 kg
Clamp (60 mm) | SWL 650 kg (SF 8:1)

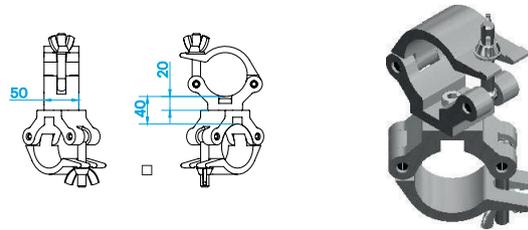


CLP-P636 weight = 1.5 kg
Swivel coupler (60-63.5 mm) | SWL 650 kg (SF 8:1)

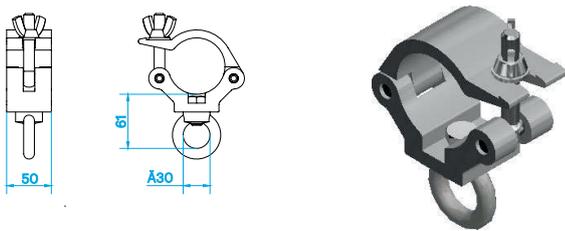

CLP-P637 weight = 1.00 kg
Clamp with eye nut (60mm) | SWL 340 kg (SF 8:1)

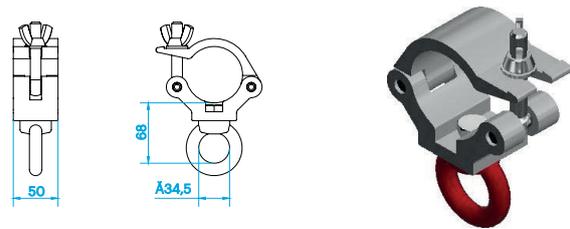

CLP-P638 weight = 1.00 kg
Clamp with eye nut (60mm) | SWL 650 kg (SF 8:1)

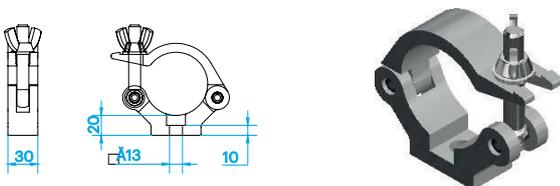

CLP-P645 weight = 1.00 kg
Clamp slim (60-63.5 mm) | SWL 510 kg (SF 8:1)

Prolyte
Industriepark 9
9351 PA Leek
Netherlands

T: +31-594 851 515
sales@prolyte.com

